


USB

Temperature / Humidity Datalogger

- The data is directly transferred to computer via USB cable, the docking station is not required.
- Water Resistant IP 65.
- Hi-Low set-up alarm.
- USB interface for set-up and data download.
- Fast USB download speed-download 50K records in less than 10 seconds.

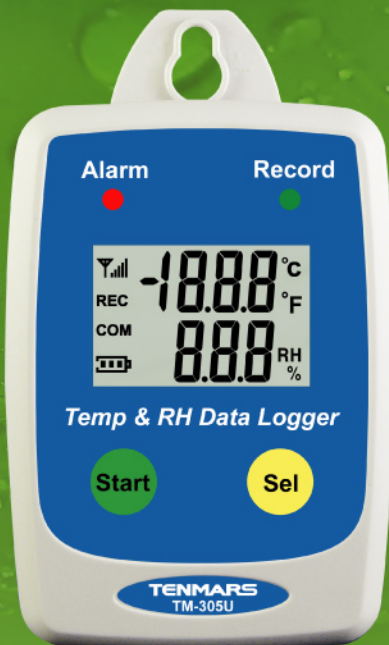


patent pending

◀ TM-305U

- Sensor : Internal.
- Type : Temperature / Humidity.
- Channel(s) : 2.
- Range : -40°C to $+85.0^{\circ}\text{C}$ / -40°F to $+185.0^{\circ}\text{F}$
- Accuracy : $\pm 0.8^{\circ}\text{C}$ / $\pm 1.5^{\circ}\text{F}$
- Range : 0-100% RH.
- Accuracy : $\pm 0.6^{\circ}\text{C}$ (1.2°F) from -20 to 50°C (-4 to 122°F) $\pm 1.0^{\circ}\text{C}$ (1.8°F) all other rangers.
- Interface : USB.
- Datalogger Memory : 50,000 records.
- Dimension : 61X 47 X15mm.

TM-306U ▶

- Sensor : Internal.
- Type : Temperature.
- Channel(s) : 1.
- Range : -40°C to 85°C (-40°F to 185.0°F)
- Accuracy : $\pm 0.6^{\circ}\text{C}$ (1.2°F) from -20 to 50°C (-4 to 122°F) $\pm 1.0^{\circ}\text{C}$ (1.8°F) all other rangers.
- Interface : USB.
- Datalogger Memory : 50,000 records.
- Dimension : 61X 47 X15mm.

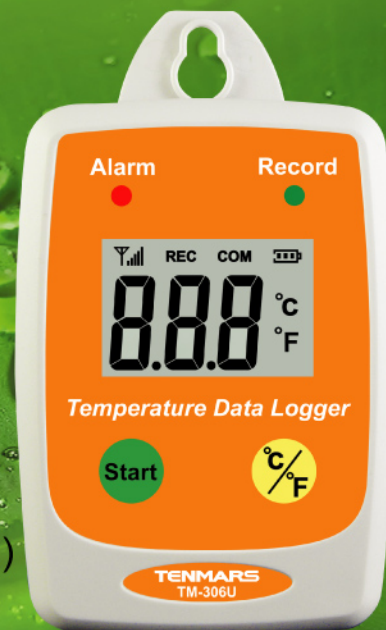

patent pending